# CT1 WASH









#### OPTICAL

Light Source	7 pcs 40W RGBW 4 in 1 LED			
Beam Angle	4° -45°			
Luminaire Output	3,100lm			
Illuminance (4° )	11,000lux @ 5m			
Illuminance (45°)	350lux @ 5m			
PWM Options	600Hz, 1200Hz, 2000Hz, 4000Hz, 6000Hz, 15000Hz			

#### DYNAMIC EFFECT


Selectable Pan Ranges	180°, 360°, 540°		
Selectable Tilt Ranges	90°, 180°, 270°		
Dimmer	0-100% electronics, 4 dimming curves options.		
Strobe	0-25Hz, selectable multiple strobe effects with different		
	speeds.		
Zoom	Motorized		
Color Mixing	RGBW mixing or CMY mixing		

## • ELECTRONIC/OPERATION TEMPERATURE

Input Voltage	100V-240V, 50/60Hz		
Power	320W		
Temperature (Ambient) -5° to 45°			

### CONTROL/CONNECTION

Control Protocol	DMX, RDM		
DMX Channels	14, 15, 19, 21		
3 pin XLR input /output			

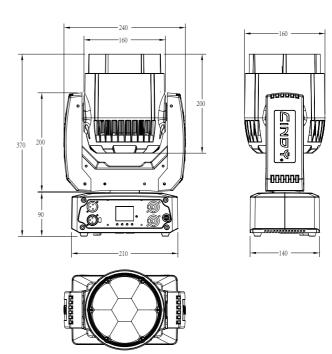

Size 240\*160\*370mm

Weight 6KG Housing Colors Black

Housing Material High-impact flame-retardant polymer

