


# TOUGH 500 SBAR

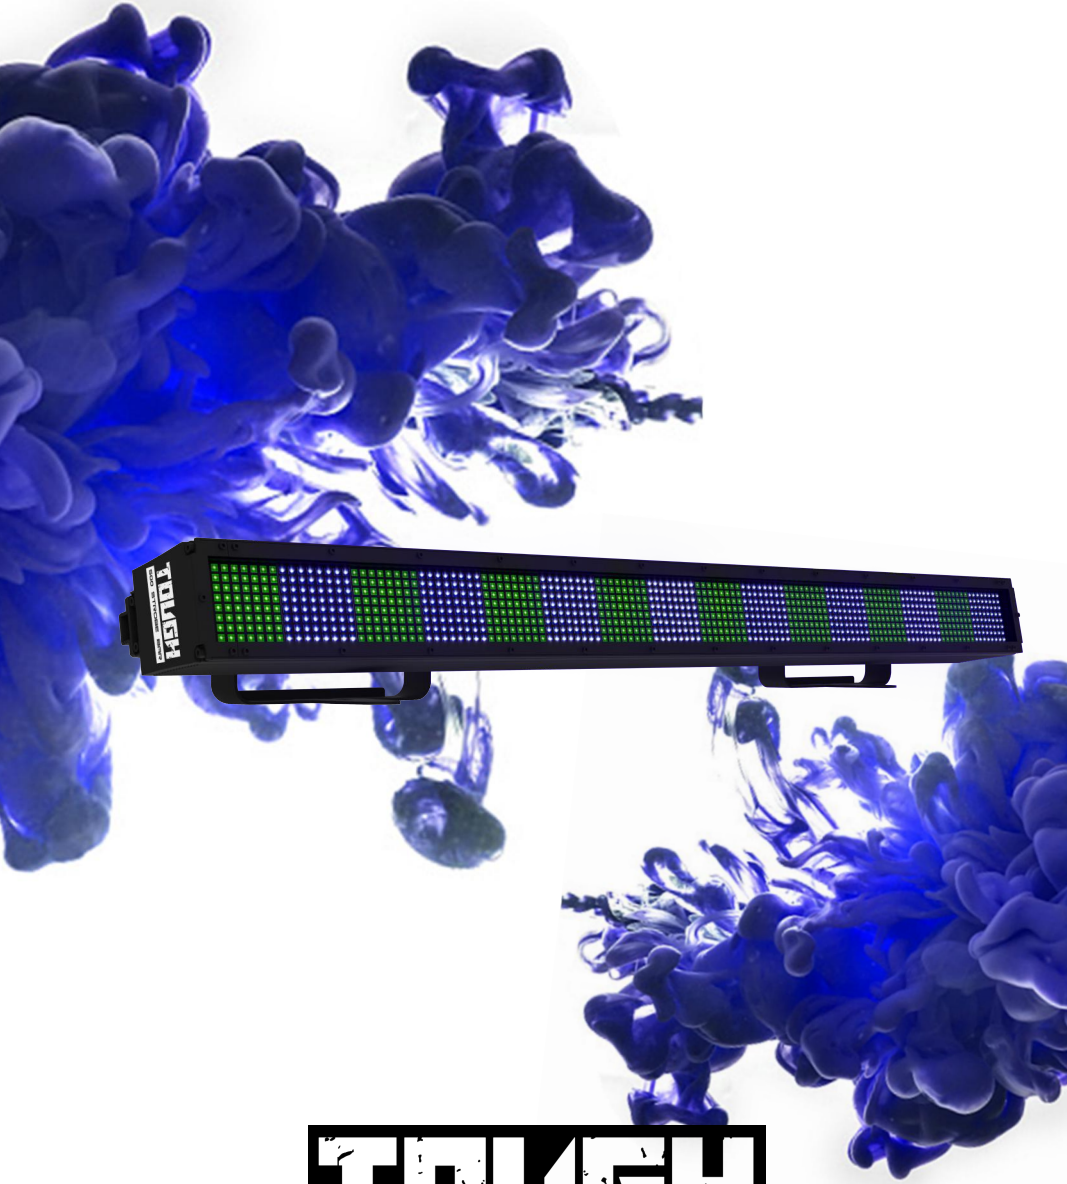

## SPECIFICATION

### OPTICAL

Light Source	1024 pcs 0.6W RGBW 4 in 1 LED
Beam Angle	120°
Luminaire Output	26,200lm
Illuminance	2,6700lux @ 2m
PWM Options	600Hz, 1200Hz, 2000Hz, 4000Hz, 6000Hz, 15000Hz

### CONTROL/CONNECTION

Control Protocol	DMX, RDM
DMX channels	15, 79, 149, 181
IP65 rated 3 pin XLR input/output	

### ELECTRONIC/OPERATION TEMPERATURE

Input Voltage	AC 200V-240V, 50Hz
Power	610W
Temperature (Ambient)	-5° to 45°

### DYNAMIC EFFECT

Color System	RGBW mixing
Dimmer	0-100% electronics, 4 dimming curves options
Strobe	0-25Hz, selectable multiple strobe effects with different speeds

### PHYSICAL

Size	1000*108*179mm
Weight	8.5KG
Housing Colors	Black
Housing material	Aluminum alloy
IP Rated	IP65

